

470-800 MHz

UHF Band IV & V



Band IV & V Panel Antenna



All weld broadband four dipole panel covering the 470-750 MHz spectrum. The robust design incorporates the finest materials available, ensuring many years of reliable performance. The radiating elements are completely welded to the support spine. This results in an enhanced reduction in PIM, even after many years of being in service, which makes this antenna ideal for digital TV broadcast or digital base station data applications.


The radome covering the dipoles and internal feed conductors allow this antenna to operate reliably under extreme snow, rain, frost, or icing conditions. Each panel can easily handle 2kW of input power, and multiple bays can be stacked horizontally or vertically to satisfy required gain or coverage.

470-800 MHz


UHF Band IV & V



Electrical

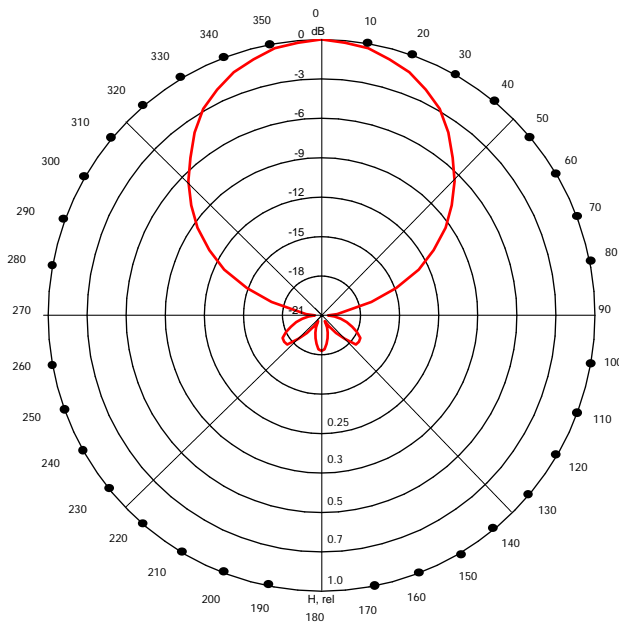

H pol - Horizontal Radiation Pattern (E-Plane)

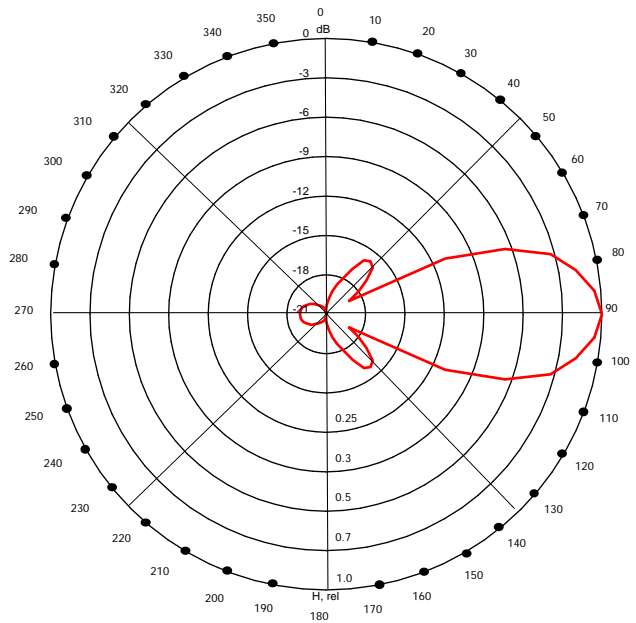

H pol - Vertical Radiation Pattern (H-Plane)

Frequency Range:	470-750 MHz
Input connector:	N female or 7-16 female
VSWR:	< 1.15
Gain:	11.5 dBd
Polarization:	Horizontal or Vertical
Impedance:	50 Ω
Max. input power:	2 kW (7-16 DIN connector)
-3dB HPBW (E-Plane):	64 degrees
-3dB HPBW (H-Plane):	28 degrees

Mechanical

Exterior material

Reflector panel: Galvanized sheet metal
Radome: UV stabilized ASA

Interior material


Radiators: Structural Aluminum
Internal feed: Machined brass

Dimensions: 1000 mm X 500 mm rear panel grid

Grounding: Antenna and radiating elements are DC grounded for lightning protection

Mounting clamps: HDG clamps are available for coverage requirements

Icing protection: Radome protecting radiating elements and feed

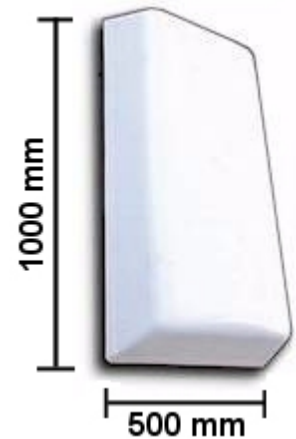

# of Bays	Panels per Bay	Total # of Panels	Gain (dBd)	Gain (Pr)	Weight (Kg) w/o mounts	Overall Height (meters)	Windload kN @ 160 km/h
1	1	1	11.5	14.13	12	1.2	1.0
	2	2	8.5	7.08	24		1.3
	3	3	6.7	4.68	36		1.6
	4	4	5.6	3.63	48		1.5
2	1	2	15.0	31.62	24	2.25	2.0
	2	4	12.0	15.85	48		2.6
	3	6	10.2	10.47	72		3.2
	4	8	9.1	8.13	96		3.1
3	1	3	16.8	47.86	36	3.4	3.0
	2	6	13.8	23.99	72		3.9
	3	9	12.0	15.85	108		4.8
	4	12	10.9	12.30	144		4.6
4	1	4	18.1	64.57	48	4.5	4.0
	2	8	15.2	33.11	96		5.2
	3	12	13.4	21.88	144		6.4
	4	16	12.2	16.60	192		6.2
6	1	6	20.0	100.00	72	6.8	6.0
	2	12	17.0	50.12	144		7.8
	3	18	15.3	33.88	216		9.6
	4	24	14.1	25.70	288		9.3
8	1	8	21.1	128.82	96	9.0	8.0
	2	16	18.2	66.07	192		10.4
	3	24	16.5	44.67	288		12.8
	4	32	15.2	33.11	384		12.4

470-800 MHz

UHF Band IV & V



Antenna Height { H } in Meters Antenna Spacing { S } in mm		
No of Bays	H	S
1	1.2	-
2	2.25	1150
4	4.5	1150
6	6.8	1150
8	9.0	1150
12	14.0	1150

Weight in KG without mounting hardware			
No. of Bays	Panels / Bay	Total No. of Panels	Weight
1	2	2	24
	3	3	36
	4	4	48
2	2	4	48
	3	6	72
	4	8	96
4	2	8	96
	3	12	144
	4	16	192
6	2	12	144
	3	18	216
	4	24	288
8	2	16	192
	3	24	288
	4	32	384
12	2	24	288
	3	36	432
	4	48	576

